

DH76

5-Part Auto Hematology Analyzer

<p>Principles Electrical Impedance method for WBC/BAS count and RBC/PLT tests Cyanide free colorimetry for HGB test Laser-based flow cytometry for WBC differentiation</p> <p>Parameters 25 reportable parameters: WBC, Neu#, Lym#, Mon#, Eos#, Bas#, Neu%, Lym%, Mon%, Eos%, Bas%, RBC, HGB, HCT, MCV, MCH, MCHC, RDW-SD, RDW-CV, PLT, MPV, PDW, PCT, P-LCR, P-LCC 4 research parameters: ALY#, ALY%, LIC#, LIC% 3 histograms for WBC, RBC and PLT One 3D scattergram and three 2D scattergrams for WBC differentiation</p>	<p>Sample volume 20μL</p> <p>Linearity range WBC: 0.00-300$\times 10^9$/L RBC: 0.00- 8.5$\times 10^{12}$/L HGB: 0- 250g/L PLT: 0- 3000$\times 10^9$/L HCT: 0~67%</p> <p>Repeatability WBC\leq2.0%(4.0-15.0$\times 10^9$/L) RBC\leq1.5%(3.5-6.0$\times 10^{12}$/L) HGB\leq1.5%(110-180g/L) MCV\leq1%(70-120fL) PLT\leq6.0%(100-149$\times 10^9$/L) \leq4.0%(150-500$\times 10^9$/L)</p> <p>Communication LAN port supports HL7 protocol Support bi-directional LIS</p>
<p>Printout External printer, compatible with multiply laser / inkjet printers, compatible with various formats and user-defined formats</p>	<p>Sample mode Whole blood, capillary whole blood and pre-diluted modes</p>
<p>Throughput Up to 90 tests per hour</p>	<p>Power requirement 100V-240V, 50/60Hz, \leq200VA</p>
<p>Storage Up to 150,000 records</p>	<p>Dimension 650mm(W)*550mm(H)*610mm(D)</p> <p>Net weight 57.5kg</p>





Fully Automatic Intelligent Technology

Visual self-tests (working status self-test and reagent volume self-detection)

Automatic test re-run, with re-run rules inside

One-button error removal and automatic standby mode function

Intelligent WBC/RBC/PLT floating threshold technology




Excellent Data Management System

A wide range of pathological alarms and up to 20 user-defined alarm ranges


Customized templates print and help to customize the final report according to requirements

Bi-directional LIS connection

QC and calibration management



Especially for blood sample untreated over a long time

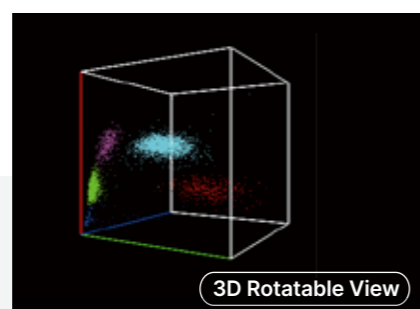

3D scattergram for accurate differentiation and pathological sample flag



Loading up to 60 samples simultaneously and supporting continuous samples loading



Up to 90 tests per hour, auto sample mixing



Multiply sample modes: whole blood, capillary whole blood and pre-diluted modes



Closed and open vial modes, emergency mode available