

Principle

CBC+DIFF/RET/NRBC: Laser scattering+Fluorescent method+Flow cytometry
RBC/PLT counting: Sheath flow impedance method
HGB calculating: Cyanide-free colorimetric method

Parameter

39 reportable parameters (Whole blood):

• WBC	• Lym%	• MCV MCH	• RET% LFR
• Neu#	• Mon%	• MCHC	• MFR HFR
• Lym#	• Eos%	• RDW-SD	• IRF RHE
• Mon#	• Bas% IgG#	• RDW-CV	• PLT PCT
• Eos#	• IG% NLR	• NRBC#	• MPV PDW
• Bas#	• PLR RBC	• NRBC%	• P-LCR
• Neu%	• HGB HCT	• RET#	• P-LCC IPF

7 reportable parameters (Body fluid):

TC-BF#, WBC-BF, MNH#, PMN#, MN%, PMN%, RBC-BF

Researchable parameters & Graph

- Up to 152 researchable parameters (Whole blood) & 11 researchable parameters (Body fluid)
- 2 Histograms & 4*3D Scattergrams & 8*2D Scattergrams (Whole blood)
- 1 Histograms & 1*3D Scattergrams & 1*2D Scattergrams (Body fluid)

Sample Mode

Whole blood, capillary blood, pre-diluted, body fluid

Sampling Mode

Auto sampling; Manual sampling(Closed);
 Manual sampling(Open)

Test Mode

• CBC,	• CBC+DIFF,	• CBC+RET,
• RET,	• CBC+DIFF(LW+LP),	• CBC+DIFF+PLT-F,
• PLT-F,	• CBC+DIFF+RET,	• CBC+DIFF+RET+PLT-F

Sample Volume

- Whole blood: all≤85ul
- Capillary blood: CBC/CBC+DIFF≤27.5ul
- Pre-diluted: all≤20ul
- Body fluid: all≤85ul

Throughput

Up to 110T/H (CBC/CBC+DIFF)

Parameter Linearity Range Precision (CV %)

WBC($10^9/L$)	0-500	≤2.5% (4.00-15.00)
RBC($10^{12}/L$)	0-8.50	≤1.5% (3.50-6.00)
HGB(g/L)	0-260	≤1.0% (110-180)
MCV(fL)	/	≤1.0% (70.0-120)
PLT($10^9/L$)	0-5000	≤4.0% (100-500)

Display

15.6 inch color screen

Data Storage

≥300,000

Barcode Scanning

Automatic rotary barcode scanning.

Data Transmission

USB, LAN port and HL7 with bi-direction LIS are available.

Printout

Compatible with multiple print formats & user-defined set

Operating Environment

- Working Environment: 15°C~32°C;
- Relative humidity: 30% ~85%;
- Atmospheric pressure: 70kPa~106kPa

Power

- Voltage: AC 100V~240V ($\pm 10\%$);
- Frequency: 50Hz/60Hz (± 1 Hz);
- Power: 660VA

Size

W*D*H: 655mm*867mm*868mm

Weight

≤115Kg

Sheikh Saeed Al Maktoum Complex, Jebel Ali Industrial Area First,
 Unit no: 198 Dubai, UAE

+971(4)2842810

contact@oryca.com

www.oryca.com



Medical Supplies LLC



MEET THE ULTIMATE

DH-800


Auto Hematology Analyzer with RET



Innovated Technology for abnormal WBC/RBC/PLT

New AI Cube 2.0 technology for WBC

- Enhance the accuracy of flagging for Blast/IG.
- Comprehensive and logical AI analysis procedure for common leukemia such as AML&ALL.

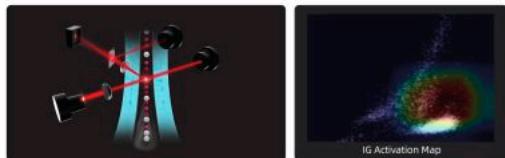


Upgraded anti-interference solution for RBC



Comprehensive solution for PLT

- New sheath flow impedance method decreases the interference by microcytes and large PLT.
- Dedicated PLT de-clump technology ameliorates the PLT aggregation issues greatly.
- Powerful PLT-F channel avoids the interference by cell debris further.

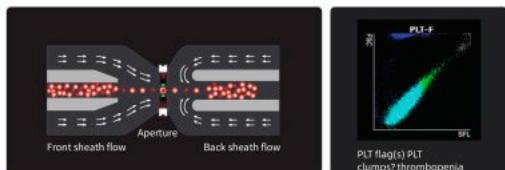

Unprecedented automation for daily operation and maintenance

Unparalleled operation experience



- 15.6 inch touch screen for the ultimate interactive experience.
- Q-button for switching common mode enhance operation efficiency.
- Loading for whole blood and capillary blood tubes simultaneously are available.

Various and flexible sampling design



Global pioneer triune sampling design including autoloading and STAT(open and closed) meets various operation habits of end-users.

Comprehensive solution for auto-maintenance



- Auto shut-down function with internal cleanser room
- Fully-auto maintenance according to the real-time analyzer status.